


FASTENERS / METRIC SERIES

Standard-duty coiled spring pins

DIN 7343

פין קפיצי סלילי

APPROVED / USER REVIEWED

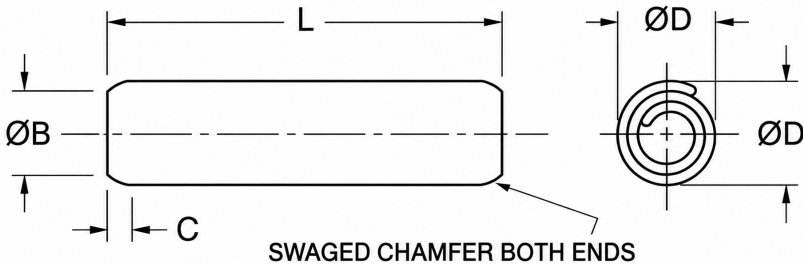

Selected dimensions

Dimensions / mm

Nominal d	D min.	D max.	B max.	C ref.	Hole min.	Hole max.
1	1.05	1.15	0.95	0.3	1	1.04
1.5	1.62	1.73	1.4	0.5	1.5	1.6
2	2.13	2.25	1.9	0.7	2	2.1
2.5	2.65	2.78	2.4	0.7	2.5	2.6
3	3.15	3.3	2.9	0.9	3	3.1
3.5	3.67	3.84	3.4	1	3.5	3.62
4	4.2	4.4	3.9	1.1	4	4.12
5	5.25	5.5	4.85	1.3	5	5.12
6	6.25	6.5	5.85	1.5	6	6.15
8	8.3	8.63	7.8	2	8	8.15
10	10.35	10.8	9.75	2.5	10	10.15
12	12.4	12.85	11.7	3	12	12.18
14	14.45	14.95	13.6	3.5	14	14.18
16	16.45	17	15.6	4	16	16.18

D: outside diameter; B: chamfer diameter; C: chamfer length, reference only; hole: recommended installation-hole limits. L: length (not tabulated).

Dimensional series: ISO 8750, standard duty. Indexed under DIN 7343; full equivalence is not asserted.

Dimensions apply before plating. Swaged chamfer at both ends. Hole dimensions are recommendations.

min.: minimum; max.: maximum; nom.: nominal; ref.: reference.