


FASTENERS / METRIC SERIES

Lifting eye nuts - dimensional sheet

DIN 582

אודם עין

APPROVED / USER REVIEWED

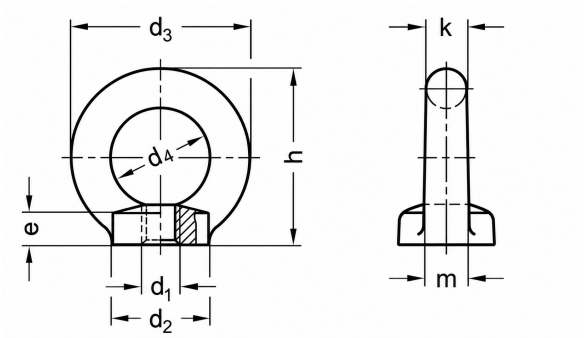

Selected dimensions

Dimensions / mm

| d1 thread | d2 | d3  | d4 | e   | h   | k  | m  |
|-----------|----|-----|----|-----|-----|----|----|
| M6        | 20 | 36  | 20 | 8.5 | 36  | 8  | 10 |
| M8        | 20 | 36  | 20 | 8.5 | 36  | 8  | 10 |
| M10       | 25 | 45  | 25 | 10  | 45  | 10 | 12 |
| M12       | 30 | 54  | 30 | 11  | 53  | 12 | 14 |
| M16       | 35 | 63  | 35 | 13  | 62  | 14 | 16 |
| M20       | 40 | 72  | 40 | 16  | 71  | 16 | 19 |
| M24       | 50 | 90  | 50 | 20  | 90  | 20 | 24 |
| M30       | 65 | 108 | 60 | 25  | 109 | 24 | 28 |
| M36       | 75 | 126 | 70 | 30  | 128 | 28 | 32 |

d1: thread designation; d2: base diameter; d3: outside eye diameter; d4: inside eye diameter; e: base height; h: overall height; k: eye thickness; m: base width.

Dimensions only. This sheet does not specify a working load limit or authorize a lifting application.